



FINE DETAIL

Metallic Joinery / Stitchwork

Milliken[®]

INSPIRED. INSPIRING.

Artistic embroidery and jewelled outlines combine with functional stitching and metallic expressions to create precious pieces with a decorative and handcrafted emphasis.






Stitchwork in Thimble and Spun Gold, herringbone installation





Metallic Joinery in Crown Gold, herringbone installation

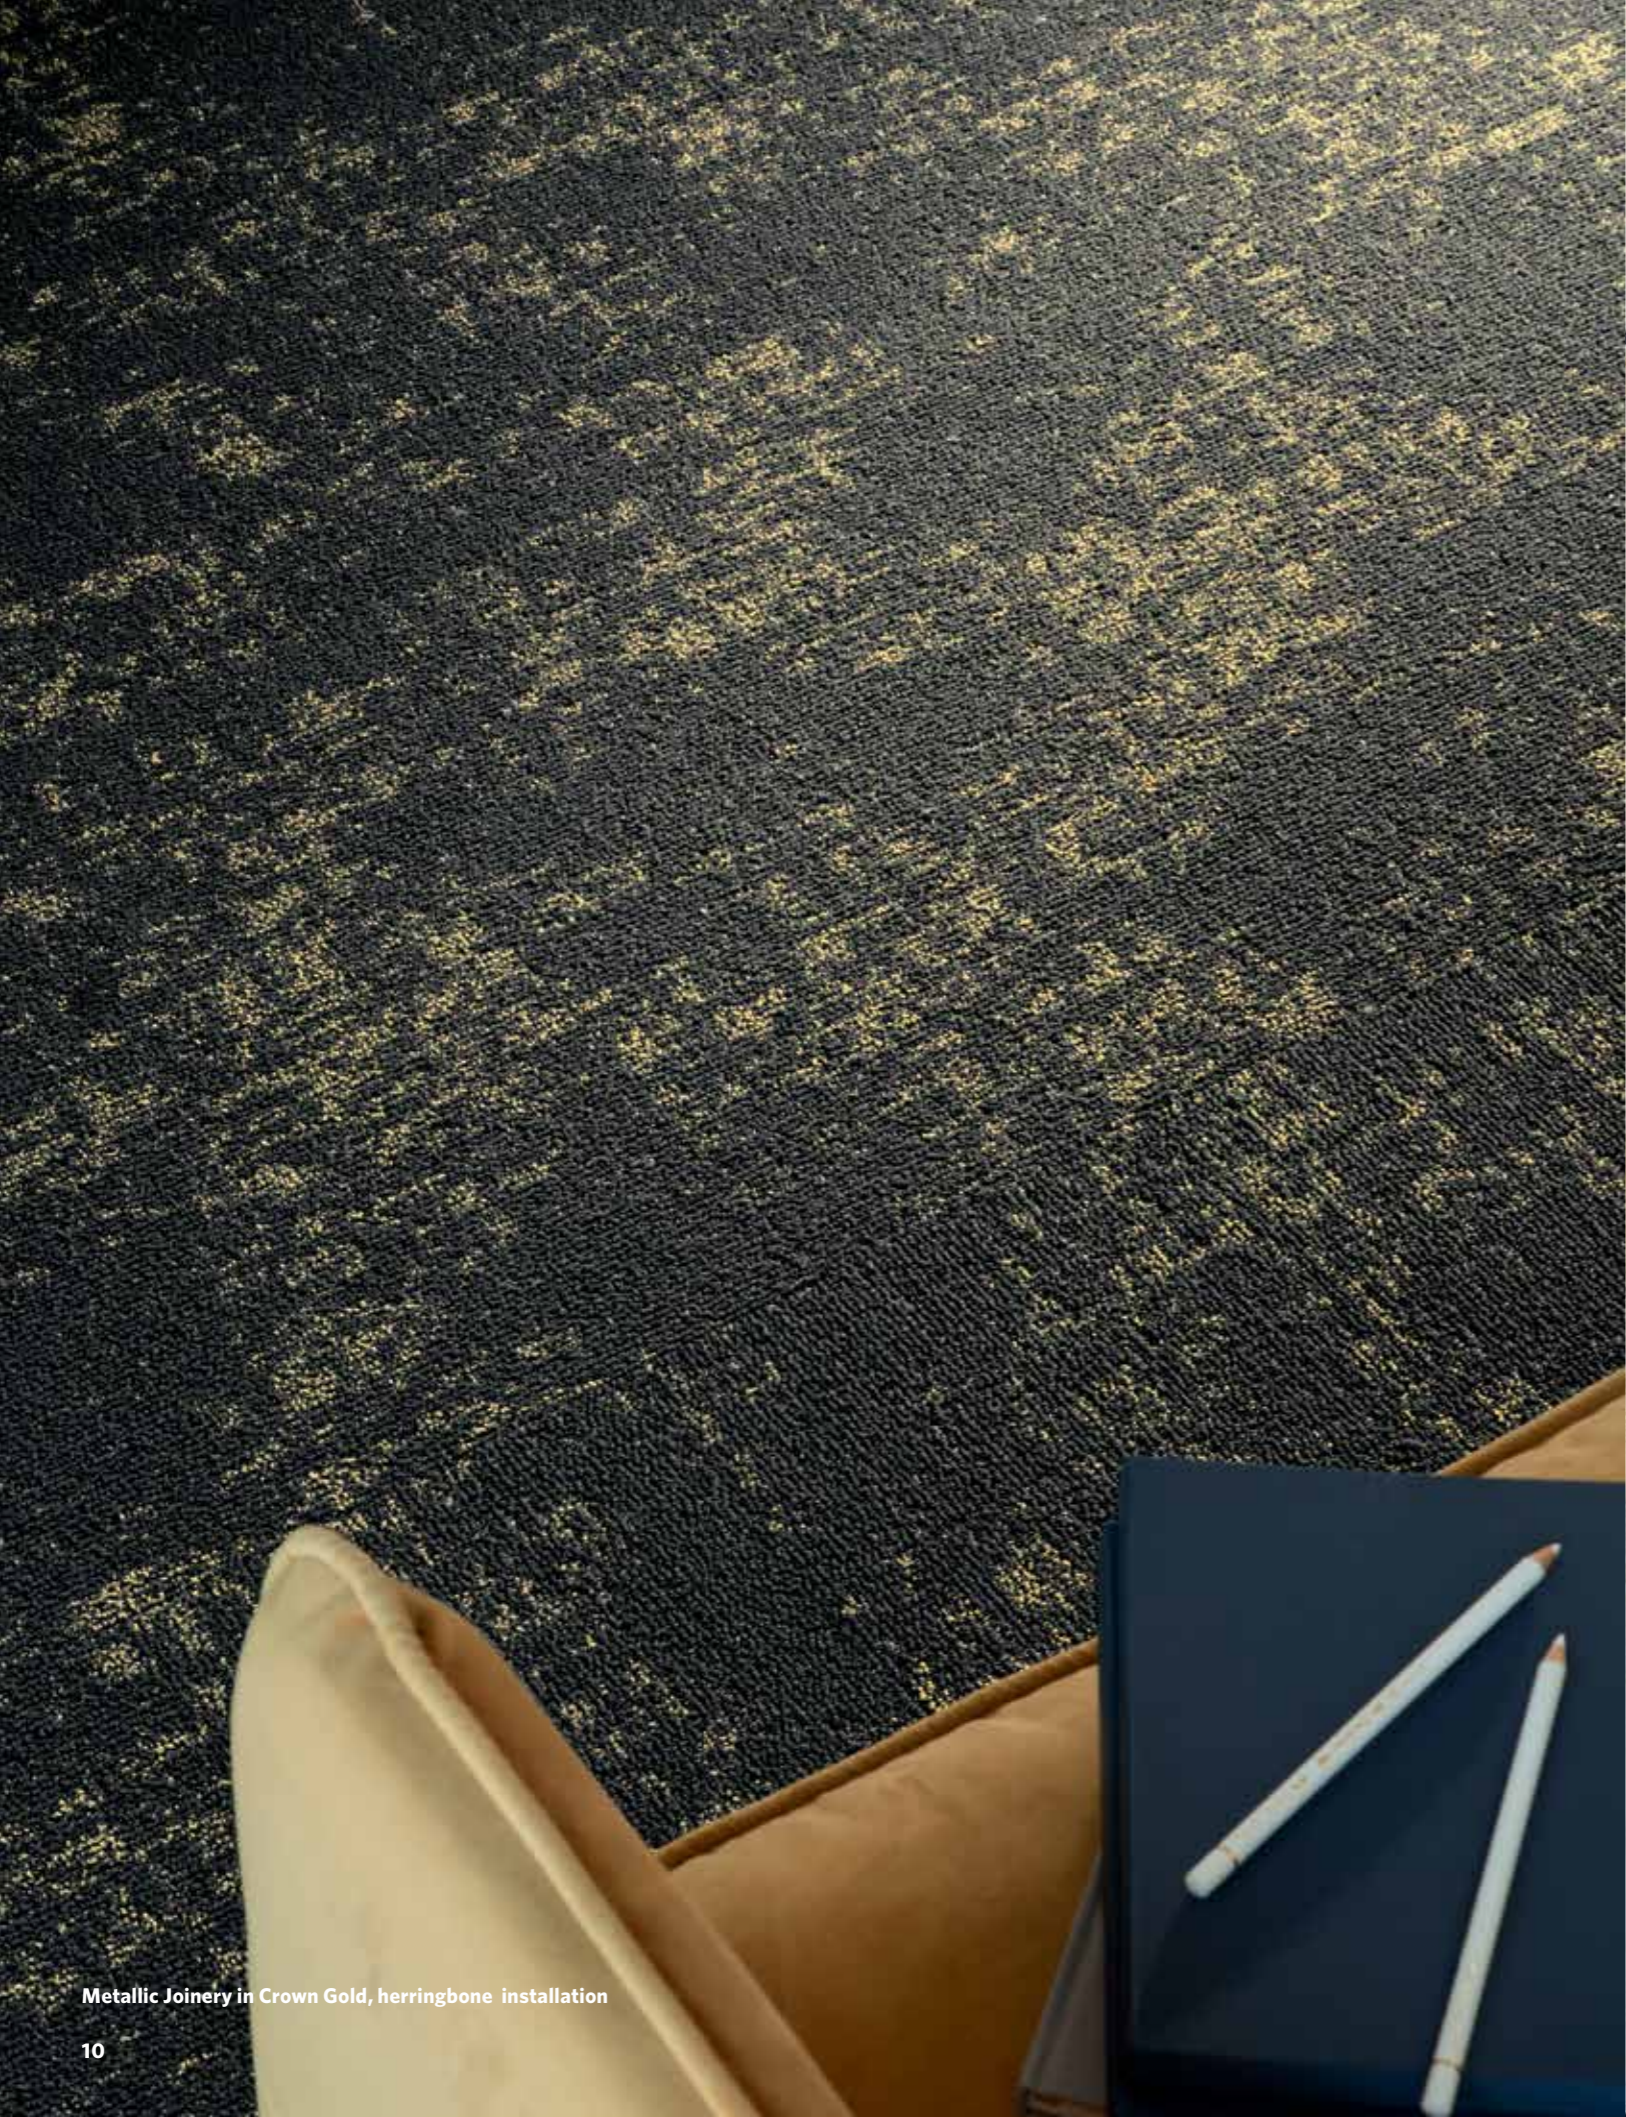

GOLD

Metallic Joinery in Crown Gold, herringbone installation






Stitchwork in Burnished Copper, ashlar installation







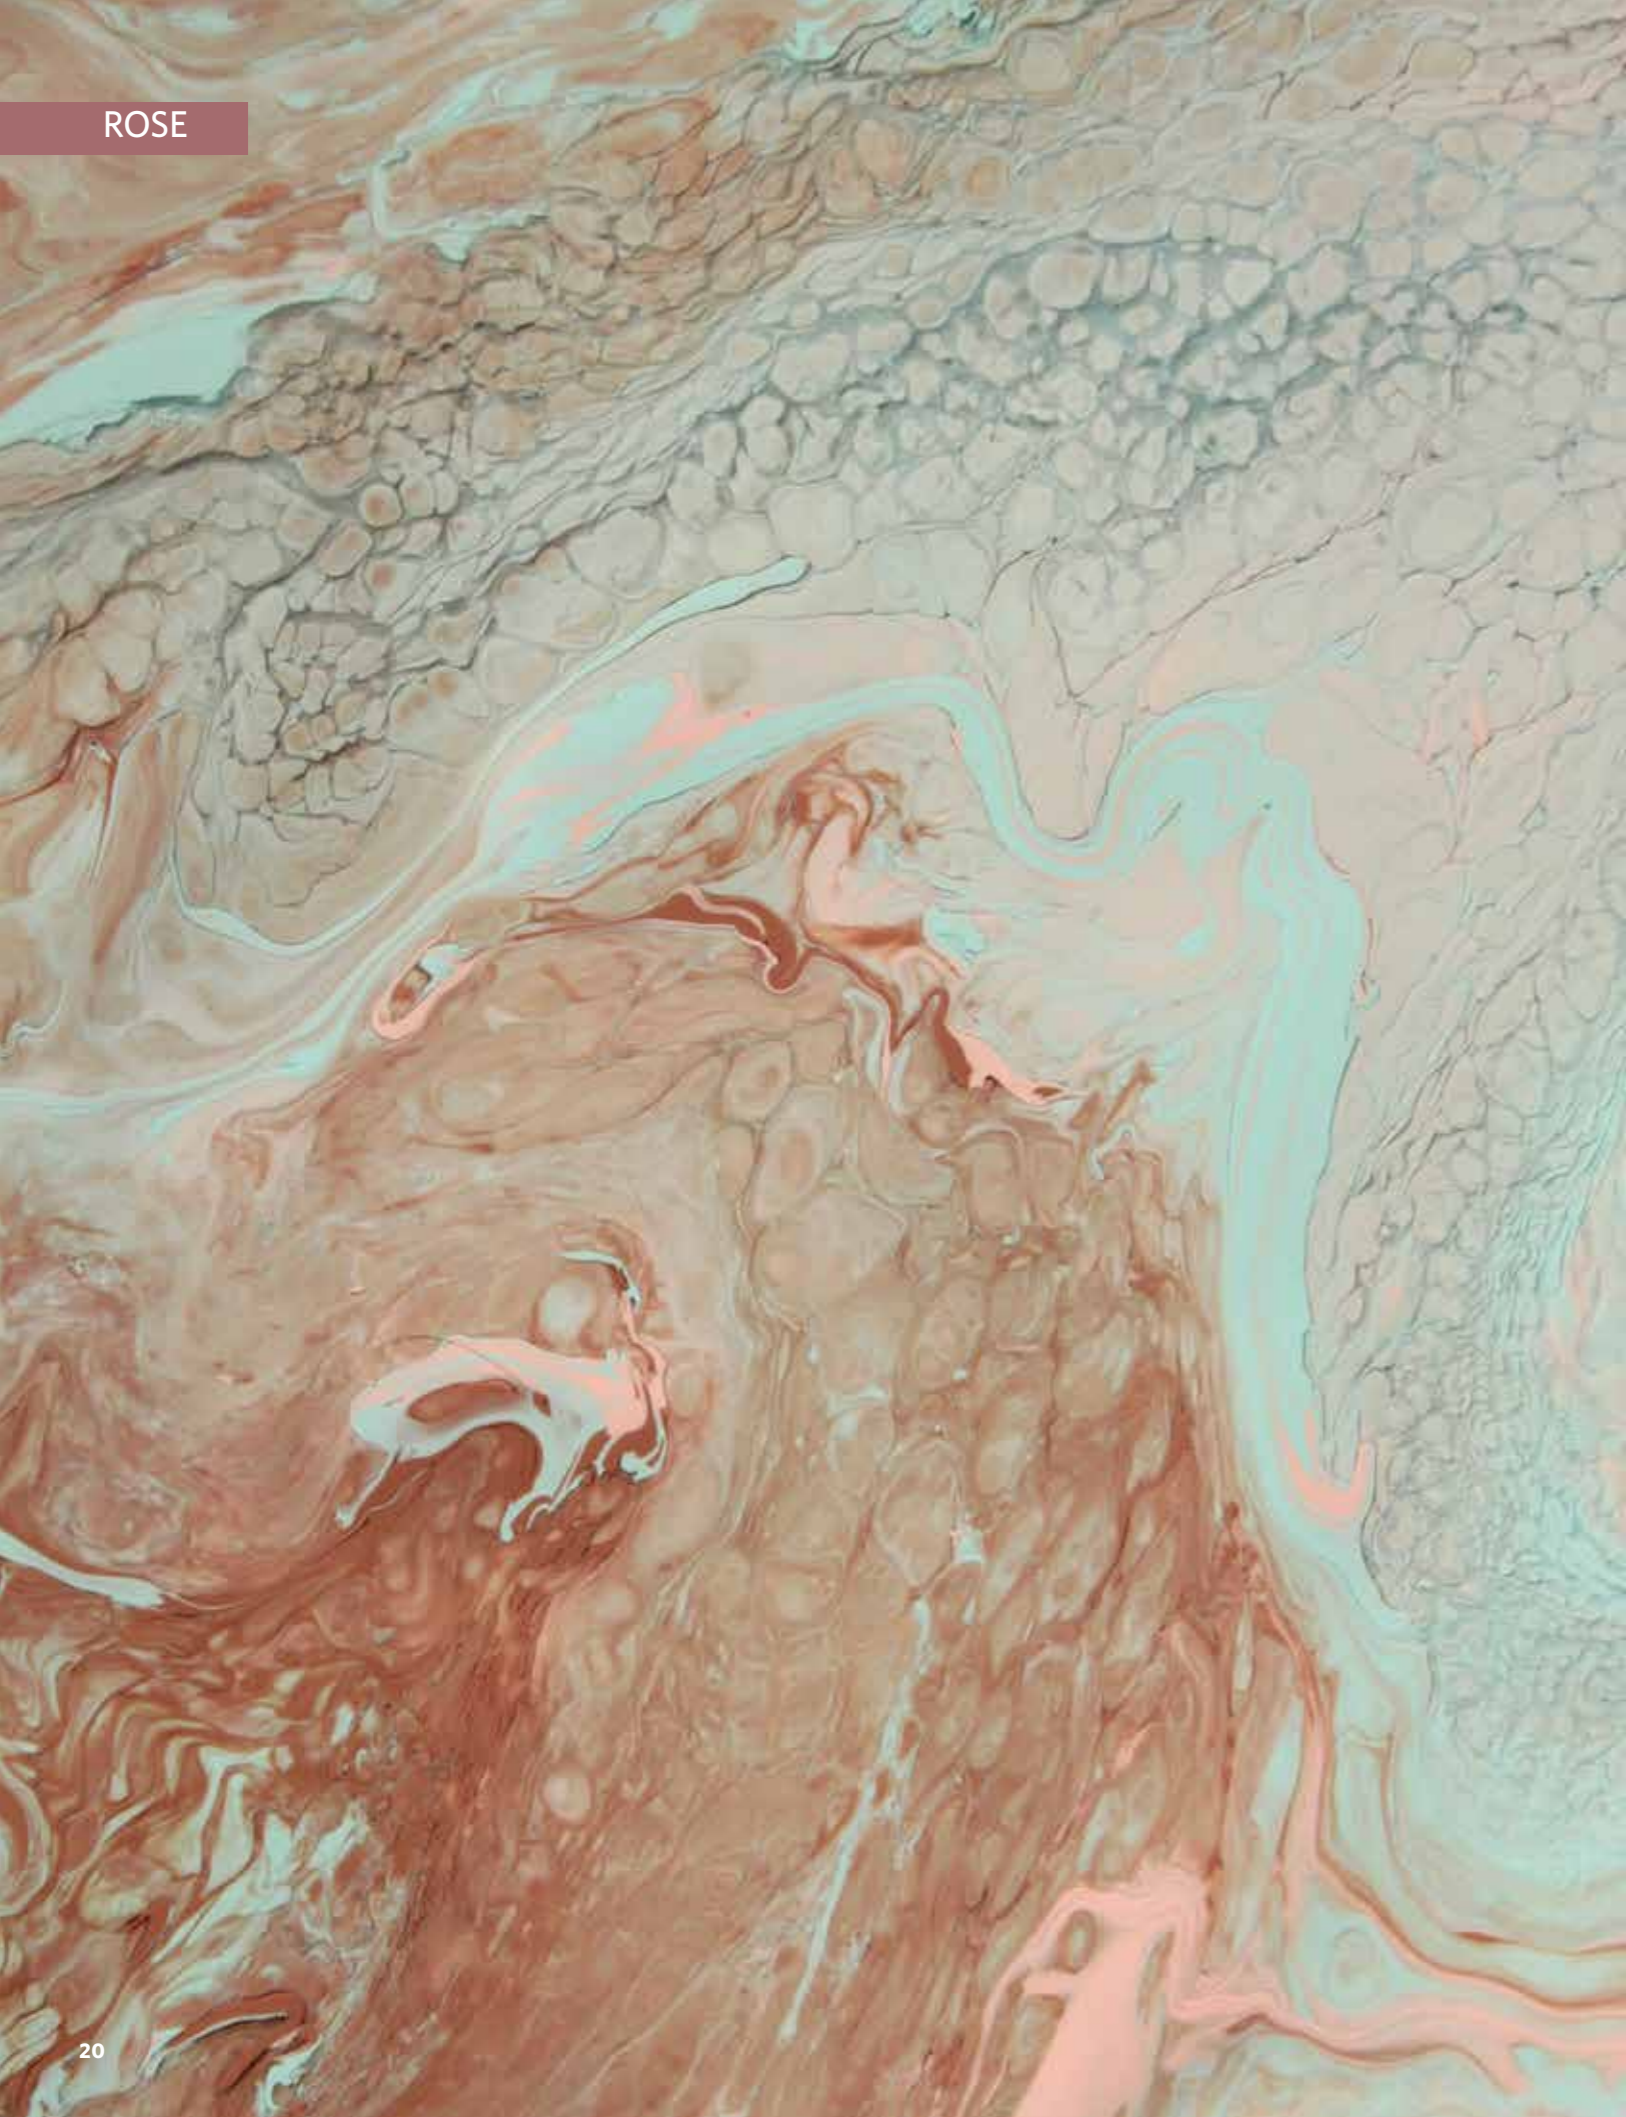

Metallic Joinery and Stitchwork in Pinking Shears, ashlar installation






Metallic Joinery and Stitchwork in Thimble, a chair installation





Metallic Joinery and Stitchwork in Polished Grey, ashlar installation

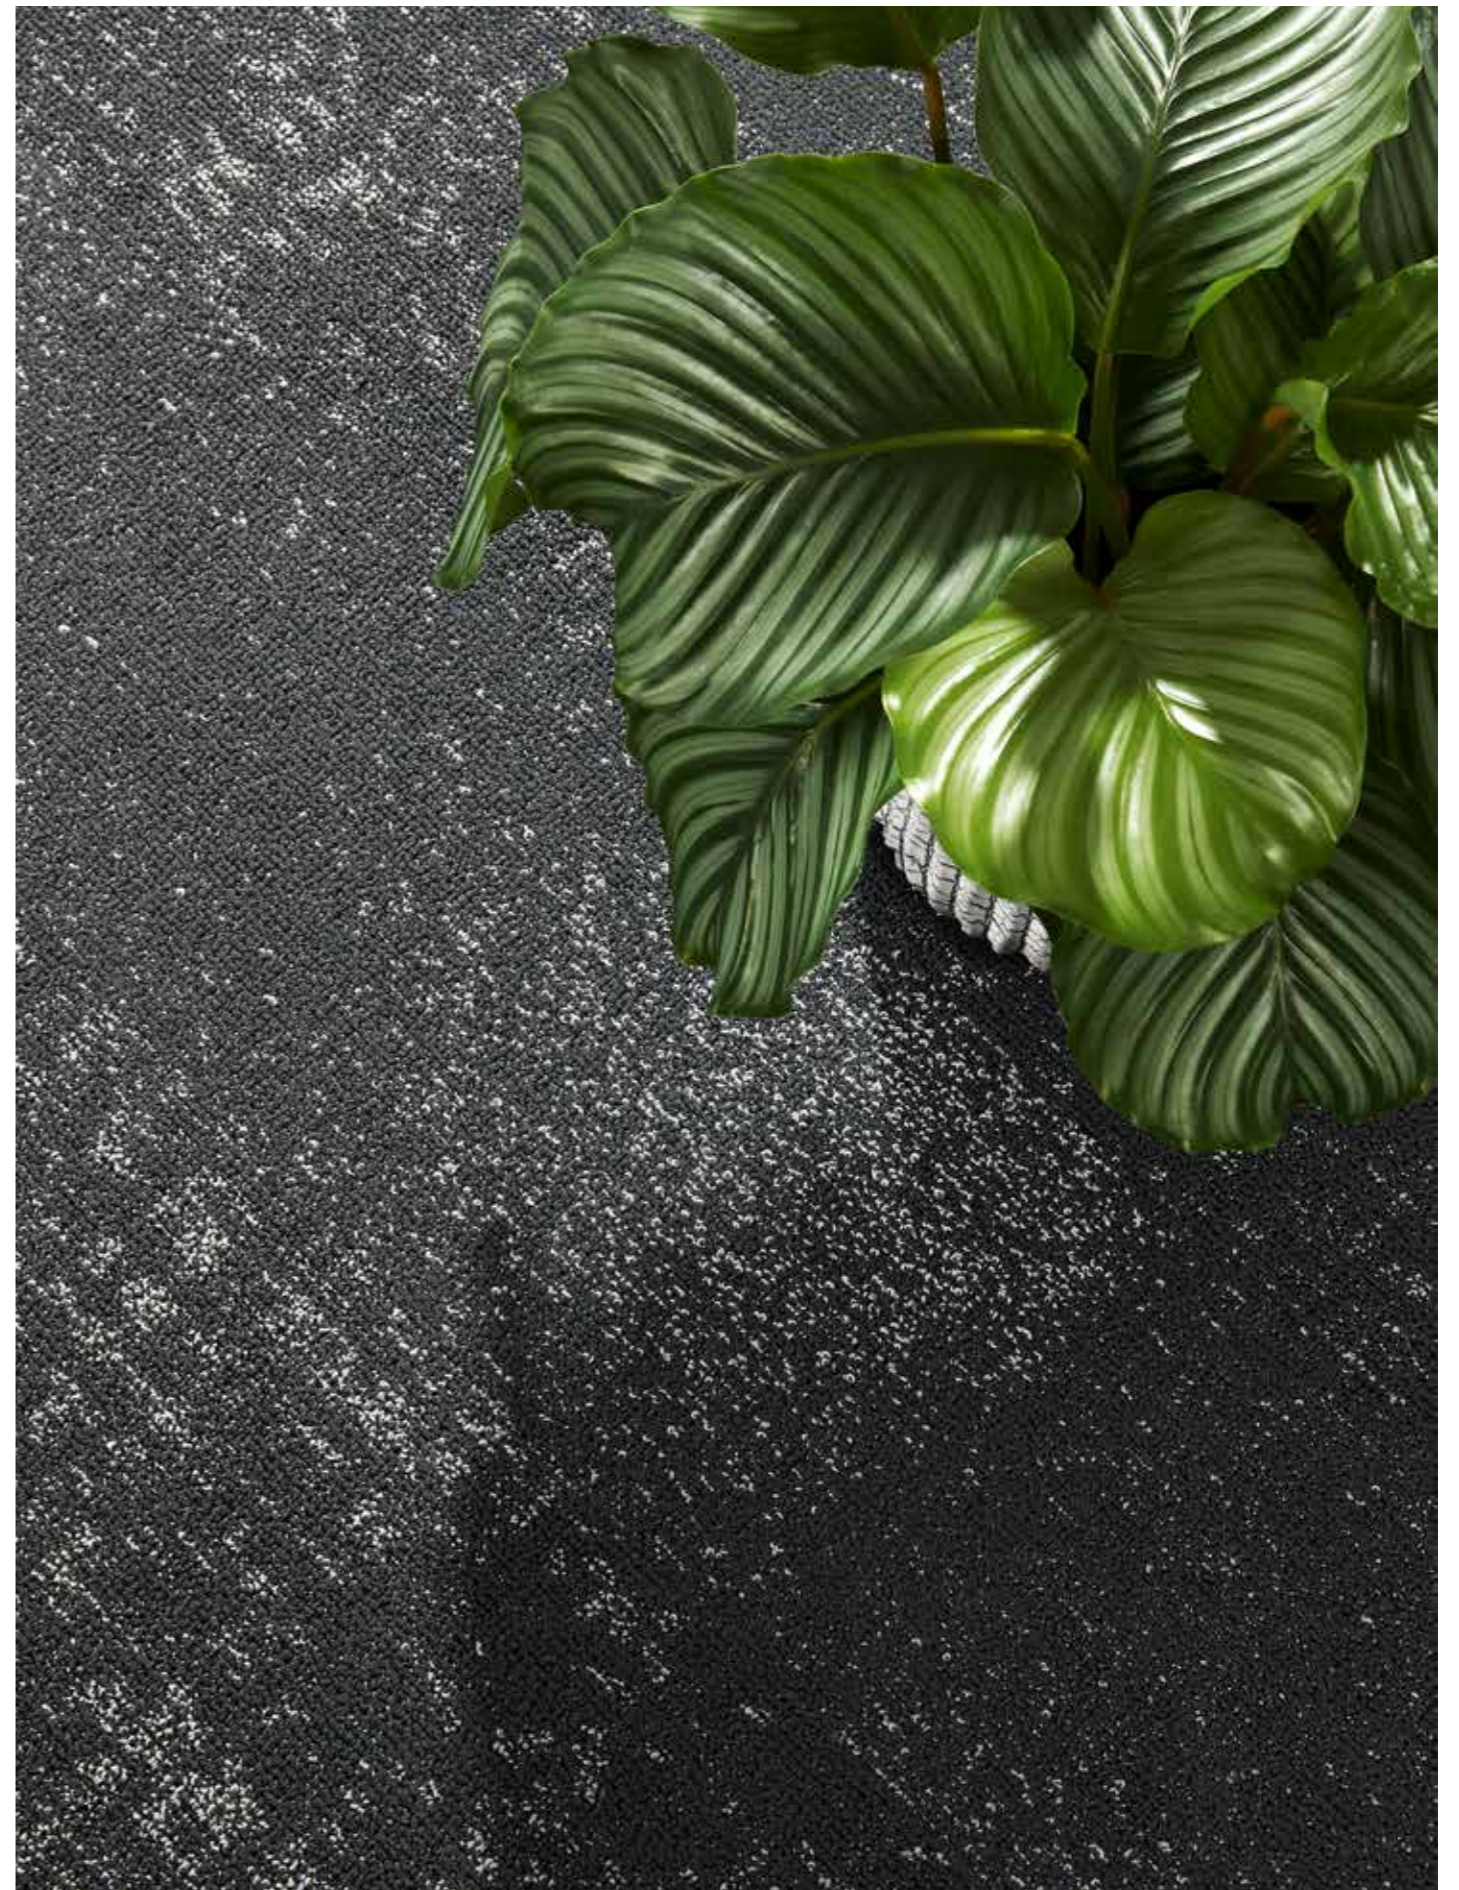

Metallic Joinery and Stitchwork in Trim, ashlar installation

COLORLINE

Stitchwork



SCK144-173 THIMBLE
SCK144-13 FINE SILVER
SCK144-46 ILLUMINATED SILVER
SCK144-174 TRIM
SCK144-106 POLISHED GREY
SCK144-119 ENAMELLED

Metallic Joinery



MJY144-173 THIMBLE
MJY144-13 FINE SILVER
MJY144-46 ILLUMINATED SILVER
MJY144-174 TRIM
MJY144-106 POLISHED GREY
MJY144-119 ENAMELLED



SCK105-173 SPUN GOLD
SCK105-13 CROWN GOLD
SCK98-46 BURNISHED COPPER
SCK98-174 BRONZE COPPER
SCK104-106 PINKING SHEARS
SCK104-119 PINK ROSE



MJY105-173 SPUN GOLD
MJY105-13 CROWN GOLD
MJY98-46 BURNISHED COPPER
MJY98-174 BRONZE COPPER
MJY104-106 PINKING SHEARS
MJY104-119 PINK ROSE

GOLD

COPPER

ROSE

GOLD

COPPER

ROSE



FINE DETAIL

Metallic Joinery / Stitchwork

SPECIFICATION

Construction - Tufted, Textured Loop

Tile Size - 25cm X 100cm (9.8" X 39.4")

Face Fiber - ECONYL® Solution-Dyed Nylon

Dye Method - Solution Dyed

Standard Backing - PVC-Free WellBAC™ Comfort
Available with TractionBack®

Nominal Total Thickness - 8.6 mm AVG.

PERFORMANCE

Flammability - ≥ 0.45 (Class I)

Texture Appearance Retention Rating (TARR) - Heavy

Indoor Air Quality - CRI Green Label Plus™ - GLP100130, Carpet Category 13X

技术指标

结构 - 簇绒织造圈绒结构

产品尺寸 - 25 厘米 X 100 厘米 (9.8 X 39.4 英寸)

表层纤维 - ECONYL® 原液染尼龙

染色技术 - 原液染色

标准底垫 - 不含 PVC 之 WellBAC™ Comfort 舒适软底
可选装 TractionBack® 免胶

额定总厚度 - 8.6 毫米 平均

产品性能

阻燃性 - ≥ 0.45 (一级)

外观保持等级 (TARR) - 频繁商业使用

室内空气质量 CRI Green Label Plus™ - GLP100130, 地毯类别 13X

Installation Method 安装方式:



Planks
板条安装

TractionBack®

Simplify your modular installation with Milliken's patented TractionBack®, an innovative backing system that is faster, more cost efficient, and environmentally superior to wet adhesives and peel-and-stick carpet tile.



Declare.

ECONYL®
Made with 100% Regenerated Nylon

Milliken

China
North & North West &
South West Of China
T +86 10 6465 1206
T +86 133 0101 8460
South of China &
HK & Macau
T +86 181 1743 0032
East & Central of China
T +86 21 6145 1758

India
Bangalore
T +91 98408 98963
Delhi
T +91 95010 11800
Hyderabad
T +91 99631 64059
Mumbai
T +91 98926 00362

Rest of Asia
Manila
T +63 915 816 7127
Seoul
T +82 2 3783 0747
Singapore
T +65 6593 1301
Tokyo
T +81 3 5203 8406
Jakarta
T +6221 2960 7222



www.millikencarpet.com

2710029600
Issued Nov 2019